

13 MAR 2002

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

BKR-25102/01

U S. APPLICATION NO (IF KNOWN, SEE 37 CFR

10/088063

PRIORITY DATE CLAIMED
14/09/1999

TREATMENT OF CARBONACEOUS MATERIAL

Frederick Pearson

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:


1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☐ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

Items 13 to 20 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☐ Certificate of Mailing by Express Mail
23. ☒ Other items or information:

1000

25006

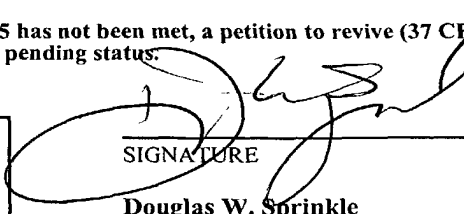U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 107.088063)		INTERNATIONAL APPLICATION NO. PCT/GB00/03546		ATTORNEY'S DOCKET NUMBER BKR-25102/01	
24. The following fees are submitted:.				CALCULATIONS PTO USE ONLY	
BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :					
<input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1040.00					
<input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00					
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00					
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00					
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00					
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$890.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than _____ months from the earliest claimed priority date (37 CFR 1.492 (e)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				\$0.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	36 - 20 =	16	x \$18.00	\$288.00	
Independent claims	2 - 3 =	0	x \$84.00	\$0.00	
Multiple Dependent Claims (check if applicable)			<input type="checkbox"/>	\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$1,178.00	
<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27). The fees indicated above are reduced by 1/2.				\$589.00	
SUBTOTAL =				\$589.00	
Processing fee of \$130.00 for furnishing the English translation later than _____ months from the earliest claimed priority date (37 CFR 1.492 (f)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				\$0.00	
TOTAL NATIONAL FEE =				\$589.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).			<input type="checkbox"/>	\$0.00	
TOTAL FEES ENCLOSED =				\$589.00	
				Amount to be: refunded	\$
				charged	\$
a. <input checked="" type="checkbox"/> A check in the amount of \$589.00 to cover the above fees is enclosed.					
b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed.					
c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 07-1180 A duplicate copy of this sheet is enclosed.					
d. <input type="checkbox"/> Fees are to be charged to a credit card. WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO:					
Douglas W. Sprinkle Gifford, Krass, Groh, Sprinkle, Anderson & Citkowski, P.C. 280 N. Old Woodward Ave., Suite 400 Birmingham, MI 48009			SIGNATURE  Douglas W. Sprinkle NAME 27,394 REGISTRATION NUMBER 3/13/02 DATE		

APPLICATION DATA SHEET

Electronic Version 0.0.11

Stylesheet Version: 1.0

Attorney Docket Number: BKR-25102/01

Publication Filing Type: new-utility

Application Type: utility

Title of Invention: TREATMENT OF CARBONACEOUS MATERIAL

Suggested Representative Figure: Figure 1

Customer Number Correspondence Address: 25006

25006

Continuity Data:

This application is a 371 of international PCT/GB00/03546 2000-09-14 Pending

Foreign Priority:

9921520.4 GB 1999-09-14 Priority Claimed

INVENTOR(s):

Primary Citizenship: GB
Given Name: Frederick
Family Name: Pearson
Residence City: Bath
Residence Country: GB
Address: 7 Victoria House
Weston Road
Bath , BA1 2XY GB

Attorney Docket No. BKR-25102/01

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Frederick Pearson

Serial No.:

Filed:

For: TREATMENT OF CARBONACEOUS MATERIAL

PRELIMINARY AMENDMENT

Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

Prior to the examination of this application, please amend the application as follows:

IN THE CLAIMS:

Please amend claim 2 as follows:

- 1 2. (Amended) The process of claim 1, in which step v) is performed by
2 removing the residue resulting from step ii) from the said chamber to a second chamber,
3 equipped with means for introducing oxygen or air and the said at least one combustible
4 gas.

Please amend claim 3 as follows:

- 1 3. (Amended) The process of Claim 1, in which ignition of the said at least
2 one combustible gas is initiated by further irradiation with electromagnetic radiation.

Please amend claim 4 as follows:

1 4. (Amended) The process of Claim 1, in which step ii) is performed by
2 introducing an inert gas or oxygen-depleted air into the said at least one chamber
3 whereby substantially to fill the said at least one chamber.

Please amend claim 5 as follows:

1 5. (Amended) The process according to Claim 4, in which the said inert
2 gas is nitrogen.

Please amend claim 6 as follows:

1 6. (Amended) The process of Claim 1, in which step iii) is performed by
2 irradiating the material with microwave radiation.

Please amend claim 7 as follows:

1 7. (Amended) The process of Claim 1, including the step of weighing the
2 carbonaceous material to determine the energy level and/or time for irradiation.

Please amend claim 8 as follows:

1 8. (Amended) The process of Claim 1, further including the step of
2 cooling the solid products of step v).

Please amend claim 9 as follows:

1 9. (Amended) The process of Claim 1, including the further step of
2 collecting the solid products of step v).

Please amend claim 10 as follows:

- 1 10. (Amended) The process of Claim 1, further comprising the step of
2 delivering the said collected products to a delivery point.

Please amend claim 11 as follows:

- 1 11. (Amended) The process of Claim 1, including the further step of pre-
2 heating the said material before step iii).

Please amend claim 12 as follows:

- 1 12. (Amended) The process of Claim 1, in which the gaseous products of
2 steps iii) and/or v) are trapped by chemical reaction or physical transformation.

Please amend claim 13 as follows:

- 1 13. (Amended) A process for the cremation of the human or animal body
2 comprising the introduction of a body within a coffin into a chamber having closure
3 means, and performing thereon the process of Claim 1.

Please amend claim 14 as follows:

- 1 14. (Amended) The process of Claim 13, in which prior to step iii) there is
2 effected a partial opening of the coffin.

Please amend claim 15 as follows:

- 1 15. (Amended) The process of Claim 14, in which the said partial opening
2 is performed by mechanical means.

1 16. (Amended) The process of Claim 14, in which the said partial opening
2 is performed by heating said coffin and body.

1 18. (Amended) The apparatus of claim 17, in which said means for
2 ignition of said at least one combustible gas comprises irradiation with
3 electromagnetic radiation.

1 19. (Amended) The apparatus of Claim 17, further comprising means for
2 weighing the carbonaceous material prior to, or upon introduction of the said material
3 into the said at least one chamber.

1 20. (Amended) The apparatus of Claim 17, further comprising means for
2 cooling the solid products of the said combustion.

1 21. (Amended) The apparatus of Claim 20, in which the said cooling
2 means comprise liquid nitrogen cooling means.

Please amend claim 22 as follows:

1 22. (Amended) The apparatus of Claim 17, further comprising means for
2 collection of the said products of combustion.

Please amend claim 23 as follows:

1 23. (Amended) The apparatus of Claim 22, further comprising means for
2 the delivery of said products to a delivery point.

Please amend claim 24 as follows:

1 24. (Amended) The apparatus of Claim 17, further comprising means for
2 pre-heating the said carbonaceous material.

Please amend claim 25 as follows:

1 25. (Amended) The apparatus of Claim 17, in which the said means for
2 extracting or displacing oxygen from said at least one chamber comprise means for
3 introducing a substantially inert gas or oxygen-depleted air whereby to substantially
4 fill the said at least one chamber.

Please amend claim 26 as follows:

1 26. (Amended) The apparatus of Claim 25, in which said inert gas is
2 nitrogen.

Please amend claim 27 as follows:

1 27. (Amended) The apparatus of Claim 27, further comprising means for
2 trapping the gaseous products of said combustion.

Please amend claim 28 as follows:

1 28. (Amended) The apparatus of Claim 17, in which the said at least one
2 chamber is formed in a portable housing, said housing having means for connection to
3 an external energy source.

Please amend claim 29 as follows:

1 29. (Amended) The apparatus of Claim 17 adapted for the cremation of
2 bodily remains.

Please amend claim 30 as follows:

1 30. (Amended) The apparatus of Claim 29, in which the said opening
2 allows introduction of said bodily remains within a coffin, and in which there are
3 provided means for effecting at least partial opening of the said coffin.

Please amend claim 31 as follows:

1 31. (Amended) The apparatus of Claim 29, in which the said opening
2 allows introduction of said bodily remains within a coffin, and in which there are
3 provided means for effecting at least partial opening of the said coffin.

Please amend claim 32 as follows:

1 32. (Amended) The apparatus of Claim 29, in which said means for
2 effecting the said at least partial opening of the coffin comprise or include means for
3 heating the said coffin and body.

Please amend claim 33 as follows:

- 1 33. (Amended) The apparatus of Claim 29 further comprising means for
2 storage of said human body and/or said coffin.

Please amend claim 34 as follows:

- 1 34. (Amended) The apparatus of Claim 33, in which said storage means
2 comprise refrigeration means.

Please amend claim 35 as follows:

- 1 35. (Amended) The apparatus of Claim 34, in which said refrigeration
2 means comprise liquid nitrogen refrigeration means.

Please amend claim 36 as follows:


- 1 36. (Amended) The apparatus of Claim 17, in which the irradiating means
2 comprise a single transducer or array of transducers whereby electromagnetic
3 radiation is selectively directed into said at least one chamber.

REMARKS

If the Examiner has any questions relating to the application, Applicant's attorney may be reached at (248) 647-6000.

Attached hereto is a marked-up version of the changes made to the claims by the current amendment. The attached page is captioned "Version with Markings to Show Changes Made."

Respectfully submitted,

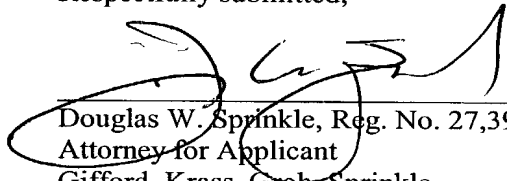
 Douglas W. Sprinkle, Reg. No. 27,394
 Attorney for Applicant
 Gifford, Krass, Groh, Sprinkle,
 Anderson & Citkowski, P.C.
 280 N. Old Woodward Ave., Suite 400
 Birmingham, MI 48009-5394
 (248) 647-6000

Date: 7/13/02

DWS/gs
 GS-W\Word Processing\dws\BKR25102-pre.doc

VERSION WITH MARKINGS TO SHOW CHANGES MADE

IN THE CLAIMS:

Claim 2 has been amended as follows:

- 1 2. (Amended) [A] The process [according to] of claim 1, in which step v) is
2 performed by removing the residue resulting from step ii) from the said chamber to a
3 second chamber, equipped with means for introducing oxygen or air and the said at least
4 one combustible gas.

Claim 3 has been amended as follows:

- 1 3. (Amended) [A] The process [according to] of Claim 1 [or Claim 2], in
2 which ignition of the said at least one combustible gas is initiated by further
3 irradiation with electromagnetic radiation.

Claim 4 has been amended as follows:

- 1 4. (Amended) [A] The process [according to any of Claims] of Claim 1
2 [to 3], in which step ii) is performed by introducing an inert gas or oxygen-depleted
3 air into the said at least one chamber whereby substantially to fill the said at least one
4 chamber.

Claim 5 has been amended as follows:

- 1 5. (Amended) [A] The process according to Claim 4, in which the said
2 inert gas is nitrogen.

Claim 6 has been amended as follows:

Claim 7 has been amended as follows:

Claim 8 has been amended as follows:

Claim 9 has been amended as follows:

Claim 10 has been amended as follows:

Claim 11 has been amended as follows:

1 11. (Amended) [A] The process [according to any preceding claim] of
2 Claim 1, including the further step of pre-heating the said material before step iii).

Claim 12 has been amended as follows:

1 12. (Amended) [A] The process [according to any preceding claim] of
2 Claim 1, in which the gaseous products of steps iii) and/or v) are trapped by chemical
3 reaction or physical transformation.

Claim 13 has been amended as follows:

1 13. (Amended) A process for the cremation of the human or animal body
2 comprising the introduction of a body within a coffin into a chamber having closure
3 means, and performing thereon the process of [any of claims 1 to 12] Claim 1.

Claim 14 has been amended as follows:

1 14. (Amended) [A] The process [according to] of Claim 13, in which prior

2 to step iii) there is effected a partial opening of the coffin.

Claim 15 has been amended as follows:

1 15. (Amended) [A] The process [according to] of Claim 14, in which the

2 said partial opening is performed by mechanical means.

Claim 16 has been amended as follows:

1 16. (Amended) [A] The process [according to] of Claim 14 [or Claim 15],
2 in which the said partial opening is performed by heating said coffin and body.

Claim 18 has been amended as follows:

1 18. (Amended) [Apparatus according to] The apparatus of claim 17, in
2 which said means for ignition of said at least one combustible gas comprises
3 irradiation with electromagnetic radiation.

Claim 19 has been amended as follows:

1 19. (Amended) [Apparatus according to] The apparatus of Claim 17 [or
2 Claim 18], further comprising means for weighing the carbonaceous material prior to,
3 or upon introduction of the said material into the said at least one chamber.

Claim 20 has been amended as follows:

1 20. (Amended) [Apparatus according to any of claims] The apparatus of
2 Claim 17 [to 19], further comprising means for cooling the solid products of the said
3 combustion.

Claim 21 has been amended as follows:

1 21. (Amended) [Apparatus according to] The apparatus of Claim 20, in
2 which the said cooling means comprise liquid nitrogen cooling means.

Claim 22 has been amended as follows:

1 22. (Amended) [Apparatus according to any of claims] The apparatus of
2 Claim 17 [to 20], further comprising means for collection of the said products of
3 combustion.

Claim 23 has been amended as follows:

- 1 23. (Amended) [Apparatus according to] The apparatus of Claim 22,
2 further comprising means for the delivery of said products to a delivery point.

Claim 24 has been amended as follows:

- 1 24. (Amended) [Apparatus according to any of claims] The apparatus of
2 Claim 17 [to 23], further comprising means for pre-heating the said carbonaceous
3 material.

Claim 25 has been amended as follows:

- 1 25. (Amended) [Apparatus according to any of Claims] The apparatus of
2 Claim 17 [to 22], in which the said means for extracting or displacing oxygen from
3 said at least one chamber comprise means for introducing a substantially inert gas or
4 oxygen-depleted air whereby to substantially fill the said at least one chamber.

Claim 26 has been amended as follows:

- 1 26. (Amended) [Apparatus according to] The apparatus of Claim 25, in
2 which said inert gas is nitrogen.

Claim 27 has been amended as follows:

- 1 27. (Amended) [Apparatus according to any of Claims] The apparatus of
2 Claim 27 [to 26], further comprising means for trapping the gaseous products of said
3 combustion.

Claim 28 has been amended as follows:

1 28. (Amended) [Apparatus according to any of claims] The apparatus of
2 Claim 17 [to 27], in which the said at least one chamber is formed in a portable
3 housing, said housing having means for connection to an external energy source.

Claim 29 has been amended as follows:

29. (Amended) [Apparatus for the cremation of the human or animal body
comprising the] The apparatus of [any of Claims] Claim 17 [to 28] adapted for the
cremation of bodily remains.

Claim 30 has been amended as follows:

1 30. (Amended) [Apparatus according to] The apparatus of Claim 29, in
2 which the said opening allows introduction of [a body] said bodily remains within a
3 coffin, and in which there are provided means for effecting at least partial opening of
4 the said coffin.

Claim 31 has been amended as follows:

1 31. (Amended) [Apparatus according to] The apparatus of Claim 30, in
2 which said means for effecting the said at least partial opening of the coffin comprise
3 or include mechanical means.

Claim 32 has been amended as follows:

1 32. (Amended) [Apparatus according to Claims] The apparatus of Claim
2 29 [to 31], in which said means for effecting the said at least partial opening of the
3 coffin comprise or include means for heating the said coffin and body.

Claim 33 has been amended as follows:

1 33. (Amended) [Apparatus according to any of Claims] The apparatus of
2 Claim 29 [to 32] further comprising means for storage of said human body and/or said
3 coffin.

Claim 34 has been amended as follows:

34. (Amended) [Apparatus according to] The apparatus of Claim 33, in
which said storage means comprise refrigeration means.

Claim 35 has been amended as follows:

1 35. (Amended) [Apparatus according to] The apparatus of Claim 34, in
2 which said refrigeration means comprise liquid nitrogen refrigeration means.

Claim 36 has been amended as follows:

1 36. (Amended) [Apparatus according to any of Claims] The apparatus of
2 Claim 17 [to 35], in which the irradiating means comprise a single transducer or array
3 of transducers whereby electromagnetic radiation is selectively directed into said at
4 least one chamber.

TREATMENT OF CARBONACEOUS MATERIAL

5 The present invention is generally directed towards improvements in the treatment of carbonaceous material. The present invention is concerned with a process and apparatus therefor, for the treatment of carbonaceous material, including organic matter, and is particularly, although not exclusively, directed towards improvements in the disposal of human and/or animal remains by cremation.

10 The disposal of carbonaceous material has conventionally been conducted by combustion in purpose-built furnaces. Such incineration has, until recently, been the method of choice for the disposal of a wide variety of carbonaceous matter including plant materials, synthetic materials such as motor vehicle tyres, medical waste, as well as human or animal remains.

15 Although originally thought to offer an efficient and relatively clean process, the consequences of incineration of carbon based materials have become increasingly apparent. It is now evident that significant and harmful emissions of toxic compounds occur during incineration and that the compounds released include
20 potent polychlorinated carcinogens such as dioxins and the related dibenzofurans. A number of studies have linked levels of such compounds, which persist in the environment and steadily accumulate in the food chain, to increased incidences of a wide range of cancers including lung and testicular cancers.

For example, the disposal of the human body by ordinary cremation results in the emission of a variety of harmful compounds including highly toxic, non-biodegradable dioxins that steadily accumulate in the environment.

5 Hospital incinerators, household waste incinerators and crematoria, have all been identified as significant contributors to such pollution and, as a result of recent legislation and the threat of future legislation, are increasingly under pressure to control their emissions.

10 The present invention starts from the realisation that harmful emissions are primarily caused by the high temperatures of ordinary, oxidative combustion processes.

The degradation of carbonaceous material including organic matter, has therefore become a subject of much investigation with some recent developments focusing on ways of achieving thermal degradation (pyrolysis) of the material without incineration. Several such methods are known to involve the absorption of electromagnetic energy in the form of microwave, infra-red and radio-frequency radiation so as to cause pyrolysis. For example, US 5 886 326 discloses a method and apparatus for incinerating garbage by preliminary microwave irradiation in vacuo, introduction of oxygen and continued irradiation to cause combustion. The method uses a silicon shroud that is heated to a temperature of 500 to 1000 °C by the absorption of energy whereby to ignite the material to be disposed of. The document suggests that the method and apparatus may be used for cremation but is

3

silent as to how exactly this may be satisfactorily achieved according to standard conventions of humane and decent disposal.

Briefly stated, the absorption of energy into the organic material by microwave
5 irradiation for example, causes the fission of the molecular bonds comprising the material in a process resembling the absorption of thermal energy. The process, which is conducted in an oxygen deficient environment to prevent possible spontaneous combustion, does not therefore lead to the high temperatures caused by a combustion process nor to the products of uncontrolled recombination of the
10 constituent atoms of the material with oxygen. Put another way, chemical reactions resulting from degradation of the material occur in a "reducing" environment rather than the "oxidising" environment of combustion. Consequently the formation of compounds of the toxic nature of the oxygen-containing dioxins and furans is largely avoided and other harmful emissions are
15 also significantly reduced.

The use of microwave irradiation for degradative pyrolysis of organic matter has hitherto been directed to the reduction of tyres, household or medical waste and the like. One such process, the so called Emery Process, first described for the
20 reduction of tyres and medical waste, has been adapted for commercial use as a medical or biomedical waste reduction system. The method, commercially known as "reverse polymerisation", comprises the use of a housing arrangement in which there are located a number of chambers for the treatment of the waste material. A continuous feed introduces the waste material into a first compartment whilst the
25 atmosphere within the housing is purged of oxygen. The material is then fed into a

second chamber where it is irradiated with microwave radiation generated by an array of transducers. After irradiation the degraded material is fed into a third compartment where it is allowed to cool and is then collected as a sterile ash-like carbon residue. The gaseous by-products of the fission of the material, which are mostly water in the form of steam and carbon dioxide are also collected by means of trapping either by condensation or by reaction with sodium hydroxide solution. The residue of the process is generally not further treated and is disposed of in land-fill.

10 The prior art also includes WO 89/04355 A1 which discloses a similar method for the treatment of carbonaceous matter (Holland Process) describing the preliminary step of heating tyre waste to a temperature of at least 250°C before microwave irradiation. The heating means is substantially effected by recycling of the gaseous products of the previous degradation from the microwave irradiation zone within a

15 housing to a preheating zone within the same housing.

Under certain circumstances the treatment of carbonaceous material by microwave irradiation, with or without preliminary heating, may not proceed to an acceptable level of completion.

According to the present invention therefore, there is provided a process for the treatment of carbonaceous material comprising the steps of:

- i) introducing the material, into a chamber having closure means,
- ii) extracting or displacing oxygen from the chamber so as to provide a substantially oxygen-depleted atmosphere,

5

iii) effecting a preliminary treatment of the material by irradiating with electromagnetic radiation of sufficient power and for a sufficient period to cause substantial degradation of the carbonaceous material to an ash-like residue;

5 (iv) introducing oxygen and air and at least one combustible gas into the said chamber, and

(v) igniting said at least one combustible gas whereby to cause combustion and reduce the residue from the irradiation step to a fine ash.

10 The present invention thus not only provides for a further reduction in volume of the processed material compared to microwave irradiation alone, but also allows for the possibility of varying the extent of irradiation so that susceptible matter is degraded and less susceptible matter is incinerated. Thus disposal may be optimised and extraneous matter may be tolerated. One circumstance in which
15 such considerations may arise is in the treatment of human or animal remains.

It will be understood that neither of the prior art processes discussed above could be directed toward the treatment of human or animal remains without significant adaptation to fulfil strict legal conditions that such remains must be disposed of by
20 a process involving combustion.

Step v) may exclude the continuance of electromagnetic irradiation; that is, the irradiation and combustion steps may be temporally separated and/or mutually exclusive.

6

Step iv) may be performed by removing the residue obtained by step ii) from the said chamber to a second chamber, equipped with means for introducing air or oxygen and containing heating means which may include introduction and combustion of combustible gas.

5

The ignition of the combustible gas may be achieved by any known means, for example it may be initiated by further irradiation with electromagnetic radiation.

10

Step ii) may be performed by introducing an inert gas or oxygen-depleted air into the at least one chamber whereby substantially to fill it.

15

In preferred embodiments of the invention step iii) is performed by irradiating the material with microwave radiation. Preferably the process includes the further step of weighing the material to be treated so as to determine the energy level and/or time for which irradiation should be continued in order to achieve the desired result. Preferably the weighing step occurs before step iii). Alternatively the weighing step may occur during step iii) so as continuously to relate the material remaining with the energy level and/or time of irradiation required to achieve the desired level of degradation.

20

The process of the present invention may also include the further step of cooling the solid products of step v) before collection. In another embodiment of the invention the process may further include the step of trapping the gaseous products

15 In arriving at a further embodiment of the present invention, Applicant has identified and solved a number of problems not apparent from the teaching of US 5 886 326. In particular, Applicant has solved the problem of irradiating a coffin and body. That problem is not addressed by the aforementioned patent and it has been
20 found that microwave irradiation of a coffin and body leads to a pressure gradient arising in the enclosed coffin that can cause the body to explode. Such a result is clearly undesirable and, since the disposal of a human body is not like the disposal of garbage and requires the provision of a coffin, a solution must be found.

8

According to a further embodiment of the present invention there is provided a process for the cremation of the human or animal body comprising the introduction of a body within a coffin into a chamber having closure means, and performing thereon a process as hereinabove described.

5

In a preferred embodiment of the present invention the step of at least partial opening of the coffin is performed by mechanical means.

10

Preferably the process comprises the further step of cooling the solid products of the combustion step. Still more preferably the process comprises an additional step of collecting the solid products of the combustion step.

15

The process may also comprise the step of grinding the cooled solid products of the combustion step in a cremulator. The process may also comprise the step of delivering the collected products to a delivery point. The collection and delivery steps may be advantageously automated. The process of the invention, including the preferred delivery steps, may also be operated so that arrival of the collected products at the delivery point is timed to coincide with the end of a funeral service. Thus, the process of the invention contemplates a complete, "one-stop" cremation of the human body whereby the ashes of the deceased may be delivered to relatives attending the funeral service.

20

25

As explained below, the present invention also contemplates a process comprising the cremation of more than one body at the same time (albeit in separate chambers). In this embodiment the steps leading to and including irradiation may

be performed at the same time. Of course, sequential irradiation steps may be performed.

5 The present invention further contemplates a preliminary step of providing refrigerated storage means for temporarily storing the human bodies prior to cremation.

10 The entire process may take place in a single chamber. This is necessary if existing cremation practices are to be maintained. It is, for example, not acceptable for human remains to be moved between different chambers for different operations. Embodiments adapted for disposal of other carbonaceous material, however, may have more than one chamber.

15 The present invention also provides apparatus for the treatment of carbonaceous material comprising a housing defining at least one chamber and having an opening for introducing the material into the said at least one chamber together with closure means for closing the said at least one chamber, the housing also comprising means for extracting or displacing oxygen from the said at least one chamber so as to provide a substantially oxygen-depleted atmosphere in the said at
20 least one chamber, means for irradiating the material in the said at least one chamber with electromagnetic radiation of sufficient power and for a sufficient time so as to cause degradation of the said material to a residue, means for admitting oxygen or air and at least one combustible gas into the presence of said residue, and means for ignition of the said combustible gas within the said at least

10

one chamber so as to cause substantial combustion and reduce the residue from the irradiation step to a fine ash.

The means for ignition may comprise irradiation with electromagnetic radiation.

5

In another embodiment of the invention the apparatus includes means for weighing the carbonaceous material prior to, or upon introduction of the material into the chamber.

10

In presently preferred embodiments of the invention the apparatus further comprises cooling means for cooling the solid products of combustion and may also comprise collecting means for collection of the solid products.

15

In one embodiment of the invention the apparatus also provides for the collection of the gaseous products of irradiation and/or combustion. The collection means may be condensers for the collection of water and sodium hydroxide or neutramag (trade name) or other means for the trapping of carbon dioxide.

20

In another embodiment of the invention the apparatus may comprise means for generating nitrogen or oxygen-depleted air. Alternatively the apparatus may include merely a store of nitrogen or oxygen-depleted air. As an alternative to nitrogen as an inert gas, helium or hydrogen may be preferred to purge the apparatus of oxygen. Helium is particularly preferred because it can be extracted using filters more quickly than the other suitable gases.

25

In a presently preferred embodiment of the invention the apparatus includes heating means for pre-heating the carbonaceous material prior to irradiation. The pre-heating means may also comprise means for effecting combustion of the material after irradiation. In a particularly preferred embodiment the heating means
5 comprise infra-red hotplates. Such heating elements can quickly significantly raise the temperature within the chamber.

In another embodiment of the present invention at least one chamber is formed in a portable housing having means for connection to an external energy source. The
10 apparatus may also be of a modular nature allowing housings to be stacked upon each other or otherwise closely arranged. The apparatus may include wheel or other rolling support means to facilitate transport. In this embodiment the housings will each contain means for irradiation and combustion of the material therein introduced but may share sources of energy, and sources of inert gas as
15 well as trapping means for the collection of gaseous products of irradiation and combustion. Preferably, however each housing will have separate collecting means for collecting the solid products of combustion.

Filter units may be provided for treating any waste liquids or gases released during
20 the treatment process. A preferred form of filter is an impregnated activated carbon filter. Use of such filters is possible because the temperature of waste products generated is low enough so that there is no degradation and/or possibility of combustion of the filters. Previously the high temperature vapours resulting from combustion could not be passed through such a filter and, consequently, it is
25 not possible so easily to remove mercury vapours. The filters can be reused

12

following removal of the contaminants. Activated carbon filters are available which treat gases and/or liquids and advantageously remove various likely components of effluent discharges including Mercury, Cadmium and Nickel. These filters are considerably cheaper than equivalents used in the prior art.

5

It is seen as advantageous if the maximum different types of treatable material can be treated with a minimum of alteration to the apparatus. The apparatus may therefore be formed from a plurality of units to be assembled in a modular array dependent of the required process. Units may include, for example, cryogenic, grinding, electromagnetic radiation generating, combustion and refrigeration modules.

10

Where the apparatus is involved with treatment of, for example, medical waste, it may be necessary to crush or grind the waste. There may be provided a cryogenic unit for waste materials to make them brittle to allow them to be crushed or ground.

15

The present invention also provides apparatus for the cremation of the human body comprising apparatus as hereinabove described.

20

Preferably the means for effecting the at least partial opening of the coffin comprise or include mechanical means. Alternatively the means for effecting the at least partial opening of the coffin may comprise or include means for heating the coffin and body.

25

13

The apparatus may also include means for cooling the solid products of the combustion. The cooling means may be liquid nitrogen cooling means.

5 In one embodiment of the present invention the apparatus further comprises means for the collection of the cooled products of combustion. Preferably the apparatus also includes a cremulator and means for the delivery of the collected products to a delivery point.

10 In a further embodiment of the present invention there may also be provided means for the temporary storage of the human body and/or the coffin prior to the cremation treatment. Preferably the storage means comprise refrigeration means for keeping the body cooled. The refrigeration means may advantageously use liquid nitrogen cooling means. Alternatively, the cooling means for cooling the ashes prior to collection may comprise a gas that can be advantageously cooled by
15 passage through the refrigerated storage means.

The temporary storage of a body or bodies may be a desirable feature of the present invention since the apparatus is transportable and modular in nature and may include its own power means. Thus the apparatus may advantageously be
20 used in conditions where distributed power does not exist or has failed and/or in conditions or countries where public health requirements demand the rapid disposal of human bodies.

Further, the apparatus of the present invention may provide for the
25 contemporaneous or accelerated cremation of more than one human body by

14

providing more than one chamber for irradiating the coffin and body with electromagnetic radiation. Preferably, each chamber may include multiple components for performing the other steps of the process of the invention. Alternatively, each chamber may be operatively linked to a common, further
5 chamber where these steps are performed.

10

In one embodiment of the present invention each irradiation chamber may be provided with irradiating means comprising a single transducer or an array of transducers. In an alternative embodiment a single transducer or array of
transducers may be centrally provided in the apparatus and is/are adjustable so as to direct electromagnetic radiation into one or other of the irradiation chambers.

15

When the electromagnetic generators are activated there may be a risk of sparking occurring within the chamber due to the presence of metals in the article being irradiated, for example teeth fillings jewellery, belt buckles and the like. To avoid
this risk the chamber may be lined with mica glass panels. Mica has high insulation properties, is temperature resistant, does not absorb water and can withstand high pressures. Although only relatively small panels can currently be made, these can be connected together by interdigitating fingers in the manner of a
multiple housing joint.

20

Various embodiments of the process and apparatus of the present invention will now be described by way of non-limiting example with reference to the following drawings in which like numerals describe like elements and in which:

15

Figure 1 is an isometric cut-away view of a first embodiment of the invention according to a first aspect;

Figure 2 is a schematic diagram illustrating apparatus for performing the process of the present invention;

5 Figure 3 is an isometric cut-away view of a third embodiment of the present invention;

Figure 4 is an isometric cut-away view illustrating the modularity of the apparatus of the present invention.

10 Figure 5 is an isometric cut-away view of a first embodiment of the invention according to a second aspect;

Figure 6 is an isometric view of a further embodiment of the invention; and

Figure 7 is a schematic plan view of a still further embodiment of the invention.

15 Referring now to the drawings and particularly to Figure 1, apparatus for performing the process of the first aspect of the invention comprises a portable housing 11 having a single chamber 12 for receipt of a coffin 13 containing a human body. The coffin 13 is introduced into the chamber via an opening 14 onto a gangway 15 formed on or in the chamber floor 16. The opening 14 is fitted with
20 a lockable door (not shown) so as to form an airtight seal on closure. Chamber floor 16 is formed as a plate or tray with slide engagement means for sliding in and out of the housing 11. A perpendicular wall 17 formed at a single edge of the plate fits into an aperture defined in the side panelling of the housing and has there handles 18 so as to allow withdrawal of the chamber floor 16 at the end of the
25 treatment process. Housing 11 further includes a compartment 19 arranged

16

underneath chamber 12. Compartment 19 contains essential electrical, mechanical, computing and monitoring equipment necessary for the operation and monitoring of the treatment process. Control dials 20 are arranged in the side wall of compartment 19 for control and adjustment of the treatment process. For example, in the embodiment illustrated the compartment 19 has ignition means 21 projecting through apertures 22 in chamber floor 16. The ignition means 21 comprises spark plugs and apertures 22 serve for the introduction of a combustible gas or mixture of gases into chamber 12.

10 In an alternative embodiment of the invention (not shown) the compartment 19 takes the form of a drawer in the side of the housing 11 so that it may be withdrawn from the housing for access to the operating machinery. The compartment may also house a cremulator (not shown) for grinding of the ash obtained at the end of the process should it be required. In one such embodiment
15 chamber floor 16 is not withdrawn from the housing at the end of the process but provided with a chute or similar so as allow the ash to be transferred to the cremulator.

Housing 11 further includes a roof panel 23 which can slide in and out of a channel
20 defined in the side wall panels. Roof panel 23 includes an array of transducers 24 for irradiating the chamber with microwave radiation arranged in a honeycomb panel behind a microwave transparent glass screen (not shown). The transducers 24 are electrically connected to a transformer or generator in compartment 19 or an external power supply by connecting wires extending through the side panelling of
25 the housing 11. Transducers 24, which may comprise magnetrons and have water-

17

cooling means, are protected from the effects of irradiation and combustion by the glass screen, which is constructed to withstand temperatures of up to 1500°C.

The front wall of the housing, in which is located the opening 14 together with its associated door, has a control panel 25 for selecting the time and/or energy level of the treatment process by the operator. This selection may be made by reference to monitoring equipment or according to the experience of the operator. To aid in the selection of the desired time for irradiation, a spy hole 26 is provided adjacent the door so that the extent of degradation can be determined visually. Spy holes 26 may of course be provided at any convenient position in the housing 11 including within the roof panel 23 and may take the form of video cameras. Roof panel 23 further provides means for the introduction of inert gas or nitrogen gas or oxygen-depleted air into the chamber as well as exit means for the evacuation of air, purging or effluent gases. It will be appreciated that where such means are provided, as in the case of the door for opening 14 and chamber floor 16, hermetic sealing means must also be provided.

Functions under automatic and/or manual control may include locking and unlocking of doors, monitoring safety parameters such as temperature or microwave leakage and initiating shut down if these are exceeded.

The embodiment illustrated in Figure 2 includes means for generating nitrogen from atmospheric air. The generated nitrogen is introduced into the chamber 11 of Figure 1 through aperture 27 via a conduit or other pipeline. The introduction of nitrogen into the chamber purges the chamber of air by displacement. The purging

Referring now to Figure 3 a further embodiment of the present invention includes a housing 111 having a weighing chamber 132, an irradiation and combustion chamber 112 and an ash collecting chamber 133. The features of the chamber 112 are similar to those previously described except that there is now provided no opening (14) in the front wall for introduction of the coffin and body. Instead

19

weighing chamber 132 is provided with the opening means for introducing the coffin and body 113 into the housing 111. Weighing chamber 132, irradiation and combustion chamber 112 and ash collecting chamber 133 are connected by a lowering partition screen 134 and transfer means that allows lateral transfer of the coffin and body from one chamber to the next. In this embodiment the control dials 120 for controlling the mechanical, electrical or computing machinery are located at the back of the compartment 119 of chamber 111. Ash collecting chamber 133 is shown with partition screen 134 lowered so as to allow collection of ash. The chamber also comprises a cavity such as that provided by a drawer (not shown). The cavity or drawer may contain or be otherwise connected to a cremulator (not shown).

Referring now to Figure 4, there is shown an embodiment of the invention in which two separate housings 211 for single chamber irradiation and combustion are stacked one above the other. The housings 211 are secured by connection means (not shown) and orientated with the openings 214 and doors facing in opposite directions from each other. The dimensions of the housing 211 are typically such that they may be arranged between walls or floors in a building. This embodiment may therefore allow the simultaneous treatment of more than one coffin and body whilst maintaining the separate identity of the treatment products and any gatherings of mourners that may be present. Furthermore such an embodiment allows the economic use of plant such as the machinery for generating nitrogen gas etc.

20

In another embodiment of the present invention (not shown), in which housings are stacked so as to face the same direction, ash collecting means are not arranged according to removable drawers. Instead each housing is adapted so as to provide a separate chute at or near the back wall of the housing so as to each connect to a dedicated cremulator located at a position on or below the ground. The number of housings that may be stacked upon or adjacent each other is not therefore limited by the need to provide space for removal of drawers or the like.

The housing of the present invention may come in a variety of sizes according to available space or stacking considerations. The materials used for the construction of the housing including microwave protection screens may be any known to the art including GRP and stainless steel. The number of microwave generating transducers 24 in the housing may vary according to the nature of the material to be processed.

15

A typical process for the treatment of a coffin containing a body according to the embodiment of Figure 1 of the present invention involves the following steps. The coffin 13 is weighed prior to its introduction into a housing 11. The operator enters the details via the keypad 25 and selects a programme for the treatment process. The chamber 12 is evacuated and then purged by the introduction of nitrogen or oxygen-depleted air. Purging of the chamber 12 is continued whilst microwave irradiation of the coffin 13 is commenced. The effluent gases of the irradiation process (mostly carbon dioxide and water in the form of steam) are carried away by the purging gas. Irradiation is continued according to a calculated time or until the operator, observing through the spy holes 26 intervenes. At the end of the

25

25

Referring now to Figure 5, in which like numerals are employed to describe elements already described in relation to Figures 1 to 4, apparatus for performing the process of the present invention comprises a portable housing 311 having two irradiation chambers 312 for receipt of a coffin 313 containing a human body and sharing a common combustion chamber 335. Each chamber 312 has an opening 314 leading onto a gangway 315 formed in or on each chamber floor 316 and which communicates with further openings 336 leading to the common combustion chamber 335. Each opening 314 and 336 is fitted with an automatic, lockable and hermetic sealing door (not shown). The chambers have compartments 319 containing the specific electrical, mechanical and monitoring equipment necessary for the operation of that part of the process associated with its purpose. In addition compartments 319 for each irradiation chamber may be equipped with sliding drawers for temporary storage of the coffin and/or body to be cremated. Cooling means (not shown) are also provided in compartment 319 for each irradiation chamber 312. Combustion chamber 335 has a compartment 319 having ignition means 321 projecting through apertures 322 in the chamber floor 316. The ignition means 321 comprise spark generators and apertures 322 serve for the introduction of a combustible gas or mixture of gases into the chamber 335. Compartment 319 for combustion chamber may also house a cremulator (not shown) and automated means for cooling and delivering ash to a delivery point (not shown) for collection by an operator.

Housing 311 includes a roof panel 323 which can slide in and out of channels defined in the outwardly facing side wall panels of each irradiation chamber. Roof

23

panel 323, includes a centrally disposed array of transducers 324 arranged behind a microwave transparent glass screen (not shown). The transducers 324, which may comprise magnetrons and have water cooling means, are operable so as to direct electromagnetic radiation into one or other chamber 312 or both chambers 312 simultaneously. Roof panel 323 is also equipped with aperture 327, allowing the evacuation of chambers 312 and/or the introduction of an inert gas, such as nitrogen, or oxygen-depleted air.

The process according to one embodiment of the invention involves the following steps: A first coffin and body are introduced into the first irradiation chamber 312, the chamber is evacuated and then purged by introduction of nitrogen or oxygen-depleted air. Purging of the chamber is continued whilst the mechanical opening means is operated and microwave irradiation of the coffin and body is commenced. At the end of the irradiation process the residue is automatically transported to the combustion chamber 335. At this point a second coffin and body are introduced into the second chamber 312 and the evacuation to irradiation steps repeated. At the same time combustible gas and air or oxygen are introduced into the combustion chamber and ignited by operation of ignition means. At the end of incineration of the first residue the ash is cooled, collected for example by vacuum extraction and comminuted before being delivered to a delivery point. The completion of the irradiation of the second body is timed to coincide with the completion of at least the collection of the ashes of the first body. The residue from the second body may then be introduced into the combustion chamber and so on.

25

24

In an alternative embodiment the initial step involves combined combustion and electromagnetic irradiation to effect opening of the coffin. Next the chamber is purged of oxygen before an exclusively irradiating step is initiated. Next oxygen is admitted together with a combustible gas before a combustion step is initiated.

5 Finally, oxygen is again purged with the introduction of liquid nitrogen for cooling purposes.

Referring now to Figure 6, another embodiment of the apparatus of the present invention comprises a housing 411 having two single, irradiation and combustion

10 chambers 412 together with equipment compartments 419 arranged at the end of each chamber. The housing further comprises storage chambers 437 arranged directly beneath each irradiation and combustion chamber 412. The compartments 419, which share a control panel 425, contain the specific electrical, mechanical and monitoring equipment necessary for the operation the process of the invention

15 including means for introducing the nitrogen or oxygen-depleted air into each chamber 412, 437. The storage chambers 437, however, will preferably house refrigeration means (not shown) rather than rely on the introduction and exit of a cooling gas.

20 Chambers 412 and 437 each comprise a fold down door 438 equipped with a handle (not shown). A window 439 formed in the door of the irradiation and combustion chamber allows observation of the process of the invention. Chambers 412 and 437 are provided with rollers 440 so as to aid the introduction of the coffin and body into each chamber. Preferably, a tray (not shown) for the coffin and

25

body is also used since it has the advantage that it ultimately retains ash prior to collection at the end of the incineration step.

5

The roof section 441 of the housing comprises the roof panel 423 having the centrally disposed, transducer or array of transducers as previously described. In this embodiment of the invention roof panel 423 includes means for generating infra-red radiation so as to initiate the incineration of the ash-like residue in the combustion step of the process. The roof section 441 of the housing is equipped with a centrally disposed exit duct 429 which is common to and operatively linked to each irradiation and combustion chamber 412.

10

The preferred embodiment of the apparatus of the invention has notable advantages over other embodiments in the simplicity of its manufacture and use. In particular it allows easy introduction of the coffin and body into the chamber 412. Further, it allows the operator to collect the cooled ashes by vacuuming them to a suitable receptacle as well as the manual cleaning of the chamber between multiple cremations. As may be expected, the process of the invention may then comprise the irradiation and incineration of a first coffin and body in one chamber 412 whilst the other is unloaded, cleaned and reloaded and so on.

15

20

Where more than one chamber is provided there may be provided means for selectively directing the electromagnetic radiation into any chamber; for example by using pivotally mounted magnetrons. Alternatively, as shown in Figure 7, electromagnetic radiation generators 524a, 524b may selectively provide radiation for one or both of two chambers 512a, 512b by way of respective wave guides

25

26

550a, 550b. The wave guides may take the form of hollow box-section metal tubes for directing the passage of such radiation, as will be known to those skilled in the art. Switches 555a, 555b are provided to direct radiation down either or both of two respective branches 560a, 560b, 565a, 565b which terminate in respective chambers 512a, 512b.

Having described embodiments of the invention with reference to the accompanying drawings it is to be understood that the invention is not limited to those precise embodiments and that various changes and modifications may be effected by one skilled in the art without departing from the scope of the invention as defined in the appended Claims.

For example, various arrangements are possible for facilitating these steps including conveyor belt and other automated means. Further, it will be apparent that the spatial arrangement of the illustrated embodiments may not be the only ones and that other spatial arrangements, particularly those facilitating the simultaneous use of more than one chapel are possible. In these arrangements communicating means or ducts may also be provided between the various chambers of the apparatus.

20

CLAIMS

1. A process for the treatment of carbonaceous material comprising the steps of
- 5 iv) introducing the material, into a chamber having closure means,
- v) extracting or displacing oxygen from the chamber so as to provide a
 substantially oxygen-depleted atmosphere,
- vi) effecting a preliminary treatment of the material by irradiating with
 electromagnetic radiation of sufficient power and for a sufficient period to
10 cause substantial degradation of the carbonaceous material to an ash-like
 residue;
- (iv) introducing oxygen and air and at least one combustible gas into the said
 chamber, and
- (vi) igniting said at least one combustible gas whereby to cause combustion and
15 reduce the residue from the irradiation step to a fine ash.
2. A process according to claim 1, in which step v) is performed by removing the
residue resulting from step ii) from the said chamber to a second chamber,
equipped with means for introducing oxygen or air and the said at least one
20 combustible gas.
3. A process according to Claim 1 or Claim 2, in which ignition of the said at
least one combustible gas is initiated by further irradiation with electromagnetic
radiation.

4. A process according to any of Claims 1 to 3, in which step ii) is performed by introducing an inert gas or oxygen-depleted air into the said at least one chamber whereby substantially to fill the said at least one chamber.
- 5 5. A process according to Claim 4, in which the said inert gas is nitrogen.
6. A process according to any preceding claim, in which step iii) is performed by irradiating the material with microwave radiation.
- 10 7. A process according to any preceding claim, including the step of weighing the carbonaceous material to determine the energy level and/or time for irradiation.
8. A process according to any preceding claim, further including the step of cooling the solid products of step v).
- 15 9. A process according to any preceding claim, including the further step of collecting the solid products of step v).
10. A process according to any preceding claim, further comprising the step of
- 20 delivering the said collected products to a delivery point.
11. A process according to any preceding claim, including the further step of pre-heating the said material before step iii).

12. A process according to any preceding claim, in which the gaseous products of steps iii) and/or v) are trapped by chemical reaction or physical transformation.
- 5 13. A process for the cremation of the human or animal body comprising the introduction of a body within a coffin into a chamber having closure means, and performing thereon the process of any of claims 1 to 12.
- 10 14. A process according to Claim 13, in which prior to step iii) there is effected a partial opening of the coffin.
- 15 15. A process according to Claim 14, in which the said partial opening is performed by mechanical means.
- 15 16. A process according to Claim 14 or Claim 15, in which the said partial opening is performed by heating said coffin and body.
- 20 17. Apparatus for the treatment of carbonaceous material comprising a housing defining at least one chamber and having an opening for introducing the material into the said at least one chamber together with closure means for closing the said at least one chamber, the housing also comprising means for extracting or displacing oxygen from the said at least one chamber so as to provide a substantially oxygen-depleted atmosphere in the said at least one chamber, means for irradiating the material in the said at least one chamber with electromagnetic radiation of sufficient power and for a sufficient time so as to cause degradation of
- 25

30

the said material to a residue, means for admitting oxygen or air and at least one combustible gas into the presence of said residue, and means for ignition of the said combustible gas within the said at least one chamber so as to cause substantial combustion and reduce the residue from the irradiation step to a fine ash.

5

18. Apparatus according to claim 17, in which said means for ignition of said at least one combustible gas comprises irradiation with electromagnetic radiation.

10

19. Apparatus according to Claim 17 or Claim 18, further comprising means for weighing the carbonaceous material prior to, or upon introduction of the said material into the said at least one chamber.

15

20. Apparatus according to any of claims 17 to 19, further comprising means for cooling the solid products of the said combustion.

21. Apparatus according to Claim 20, in which the said cooling means comprise liquid nitrogen cooling means.

22. Apparatus according to any of claims 17 to 20, further comprising means for collection of the said products of combustion.

20

23. Apparatus according to Claim 22, further comprising means for the delivery of said products to a delivery point.

31

24. Apparatus according to any of claims 17 to 23, further comprising means for pre-heating the said carbonaceous material.

25. Apparatus according to any of Claims 17 to 22, in which the said means for extracting or displacing oxygen from said at least one chamber comprise means for introducing a substantially inert gas or oxygen-depleted air whereby to substantially fill the said at least one chamber.

26. Apparatus according to Claim 25, in which said inert gas is nitrogen.

10

27. Apparatus according to any of Claims 17 to 26, further comprising means for trapping the gaseous products of said combustion.

28. Apparatus according to any of claims 17 to 27, in which the said at least one chamber is formed in a portable housing, said housing having means for connection to an external energy source.

15

29. Apparatus for the cremation of the human or animal body comprising the apparatus of any of Claims 17 to 28.

20

30. Apparatus according to Claim 29, in which the said opening allows introduction of a body within a coffin, and in which there are provided means for effecting at least partial opening of the said coffin.

25

[illegible]

PCT

(10) International Publication Number
WO 01/20228 A1

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:
— *With international search report.*


For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(30) Priority Data:
9921520.4 14 September 1999 (14.09.1999) GB

(71) Applicant and
(72) Inventor: PEARSON, Frederick [GB/GB]; 7 Victoria
House, Weston Road, Bath BA1 2XY (GB).

(74) Agent: BRYER, Kenneth, Robert; K R Bryer & Co., 7 Gay Street, Bath BA1 2PH (GB).

(54) Title: TREATMENT OF CABONACEOUS MATERIAL

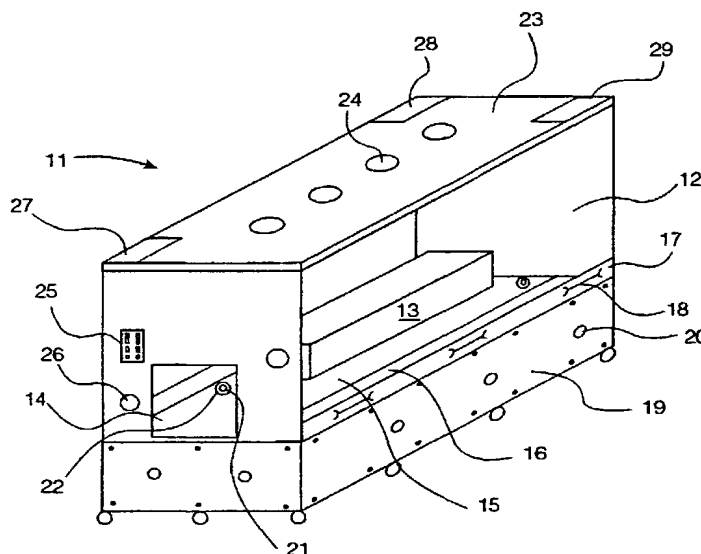

(57) Abstract: A process for the treatment of organic matter, comprises the steps of preliminary microwave irradiation in an oxygen-depleted atmosphere to give a black ash-like residue, followed by combustion of the residue to give a white ash. Hence the emissions of carcinogens such as dioxins are substantially reduced as are heavy metals such as Mercury and Cadmium. The apparatus (11) comprises a single chamber (12) in which both steps of the process are performed. The apparatus (11) also comprises means for generating nitrogen- or oxygen-depleted air as well as scrubbers (2), filters, condensers and the like for treating the gaseous products (carbon dioxide and steam) of the process. The apparatus (11) may be of a portable and modular nature - and may optionally include a cremulator.

WO 01/20228 A1

1/7

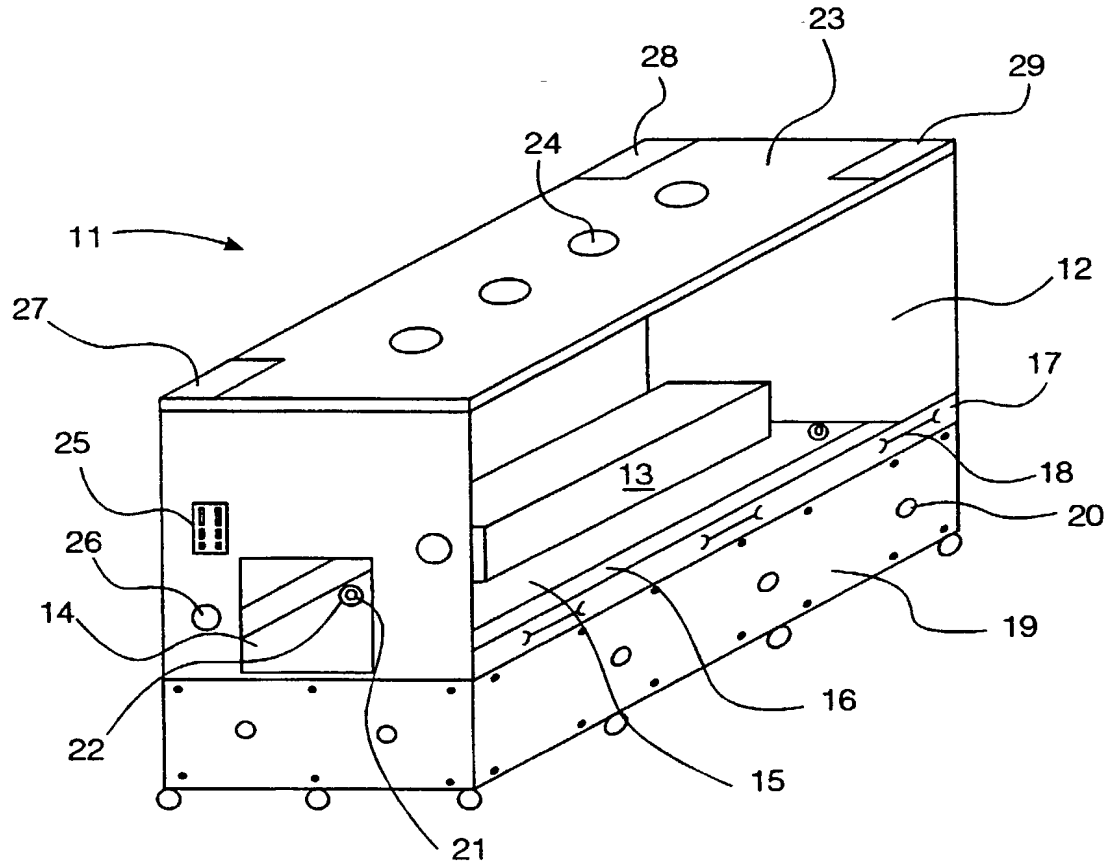


Fig. 1

2/7

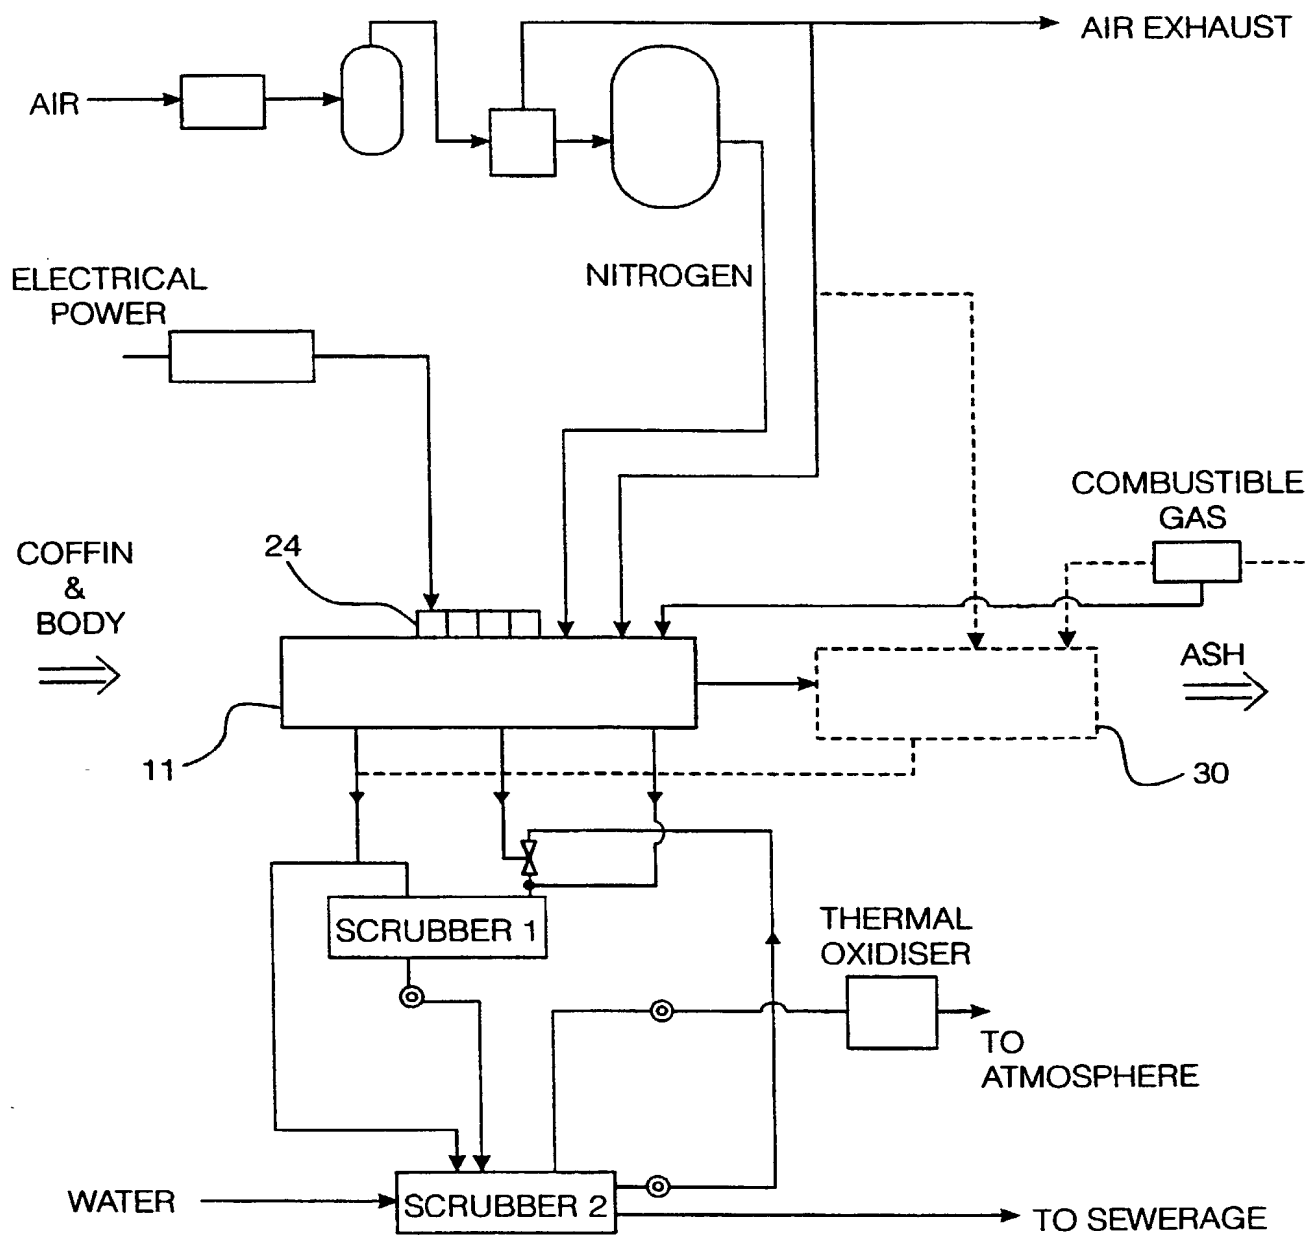


Fig. 2

3/7

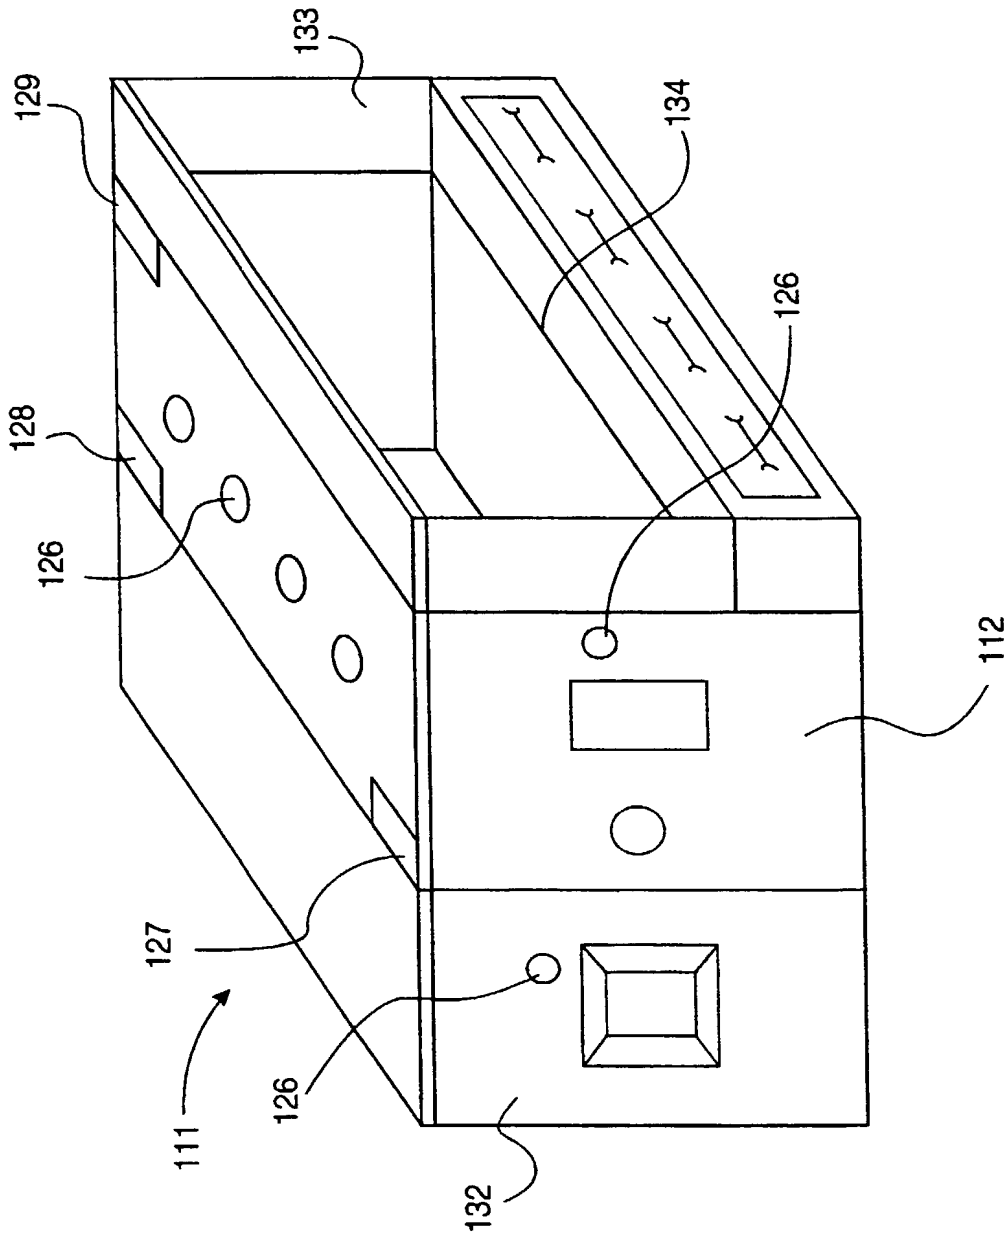


Fig. 3

4/7

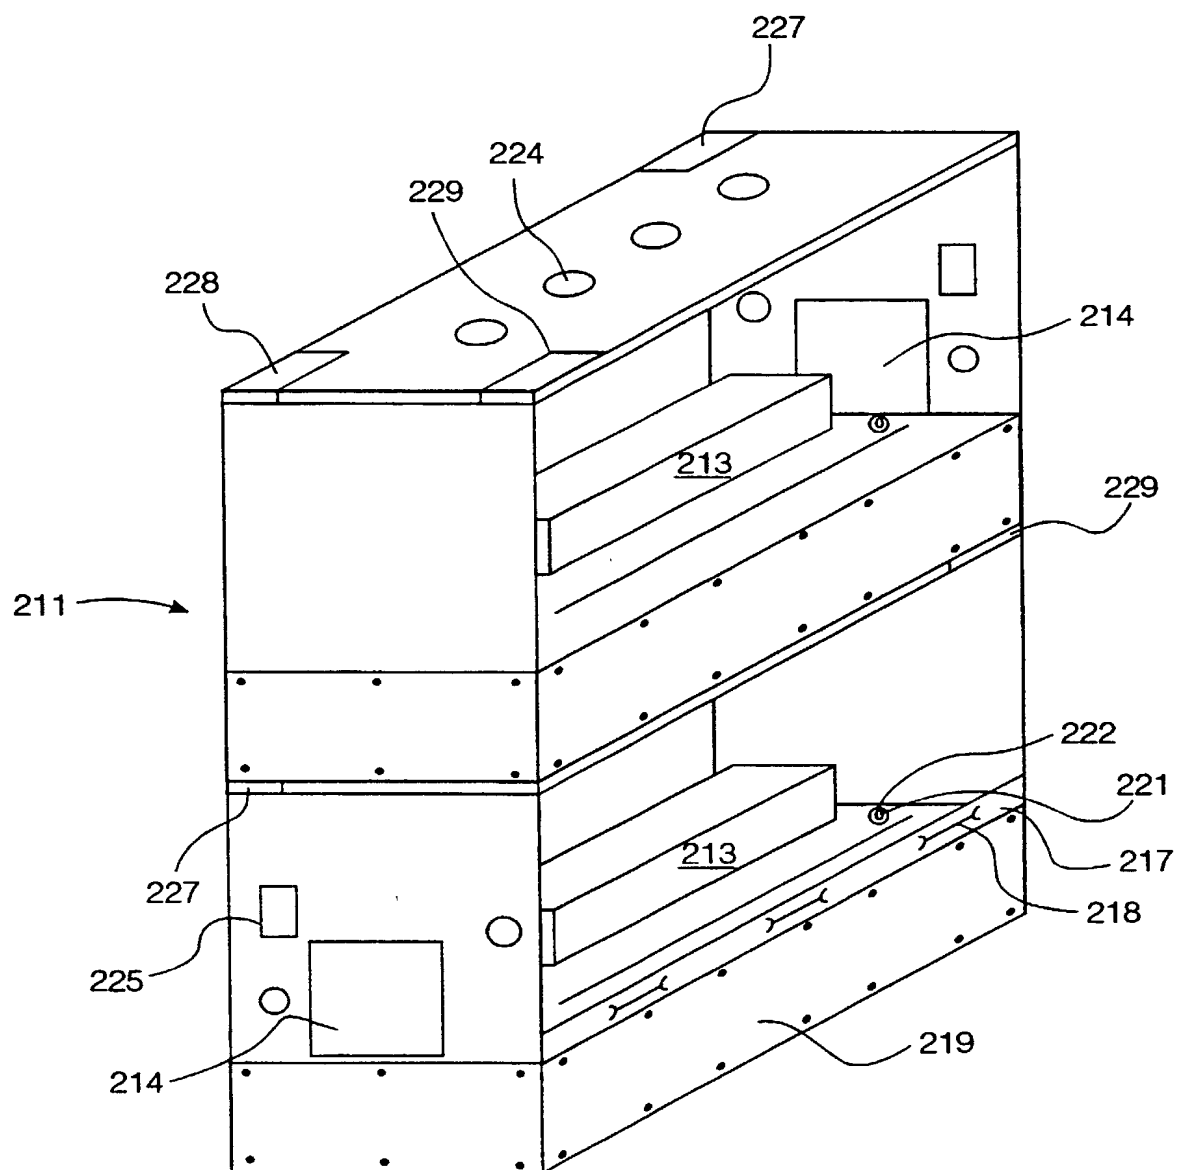


Fig. 4

5/7

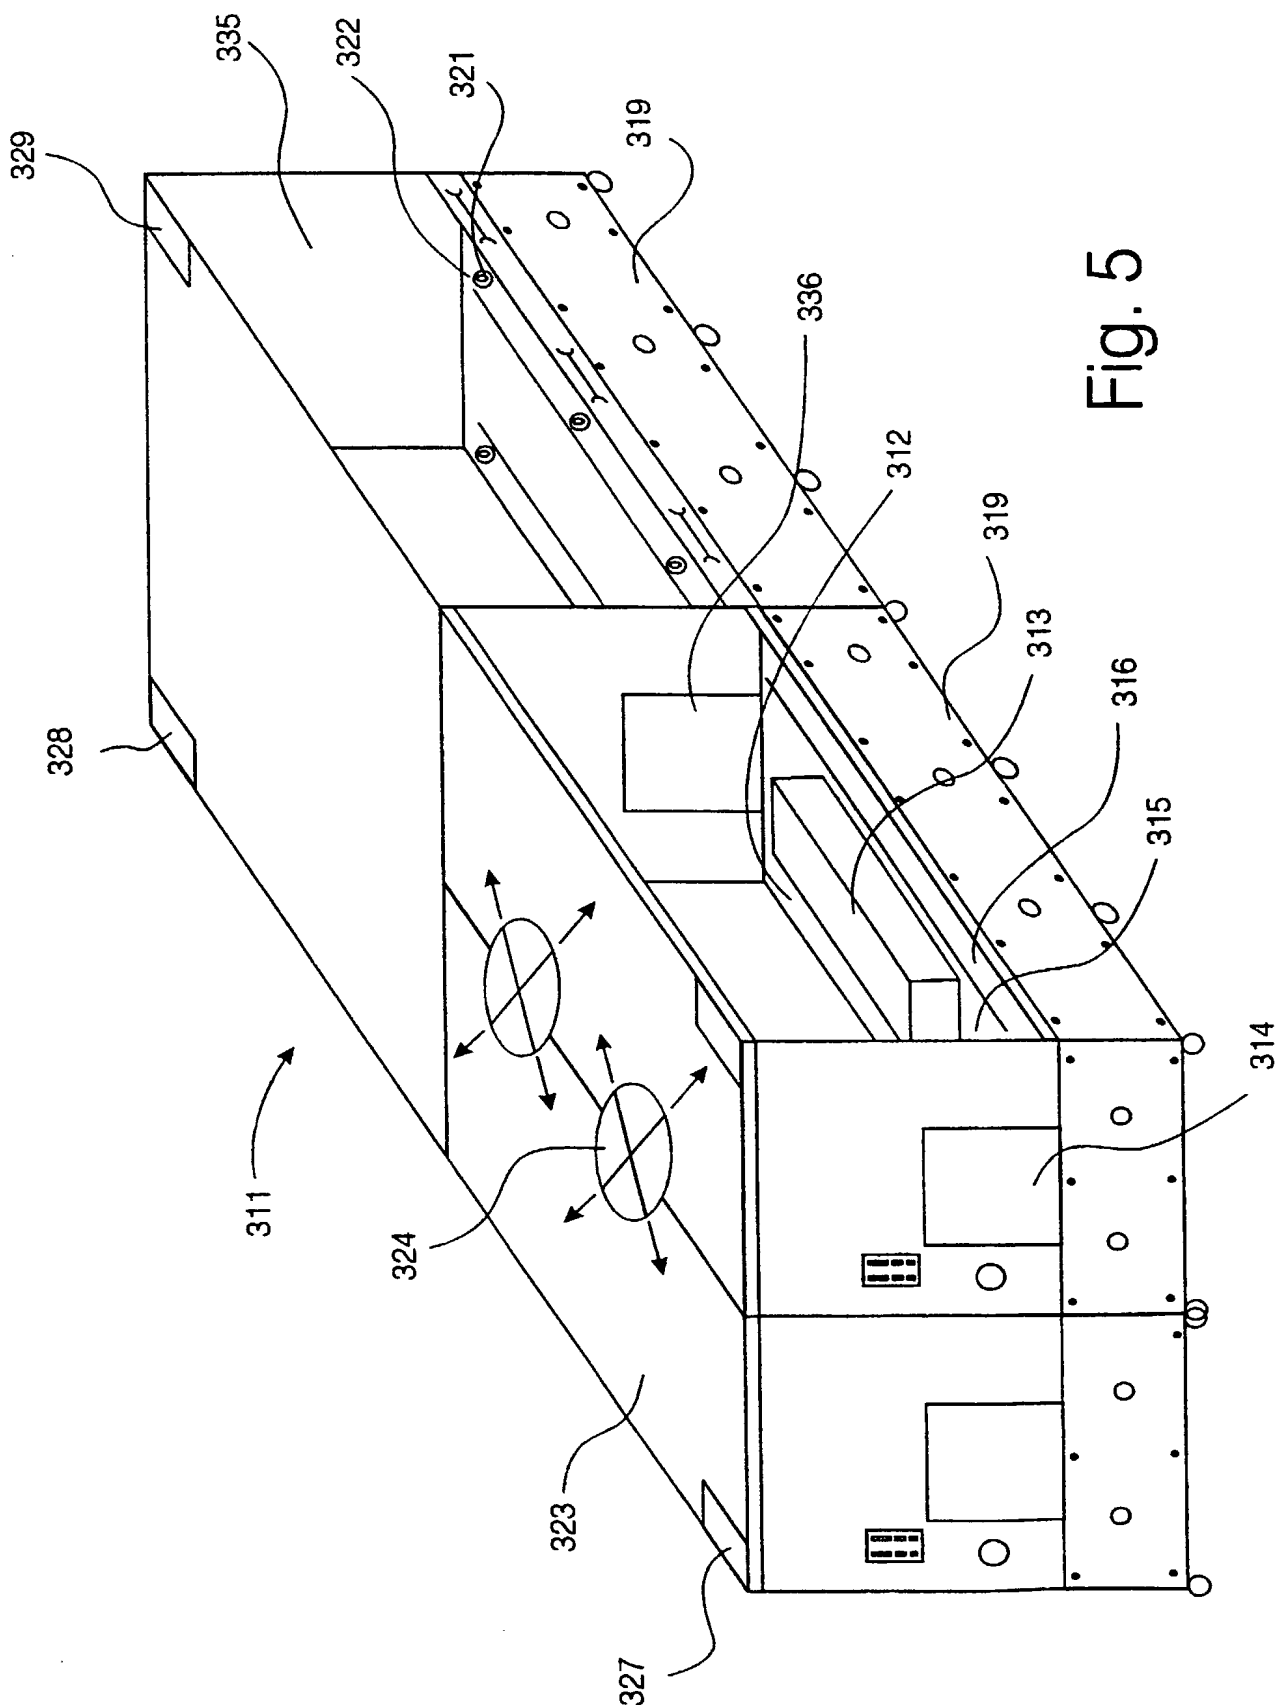


Fig. 5

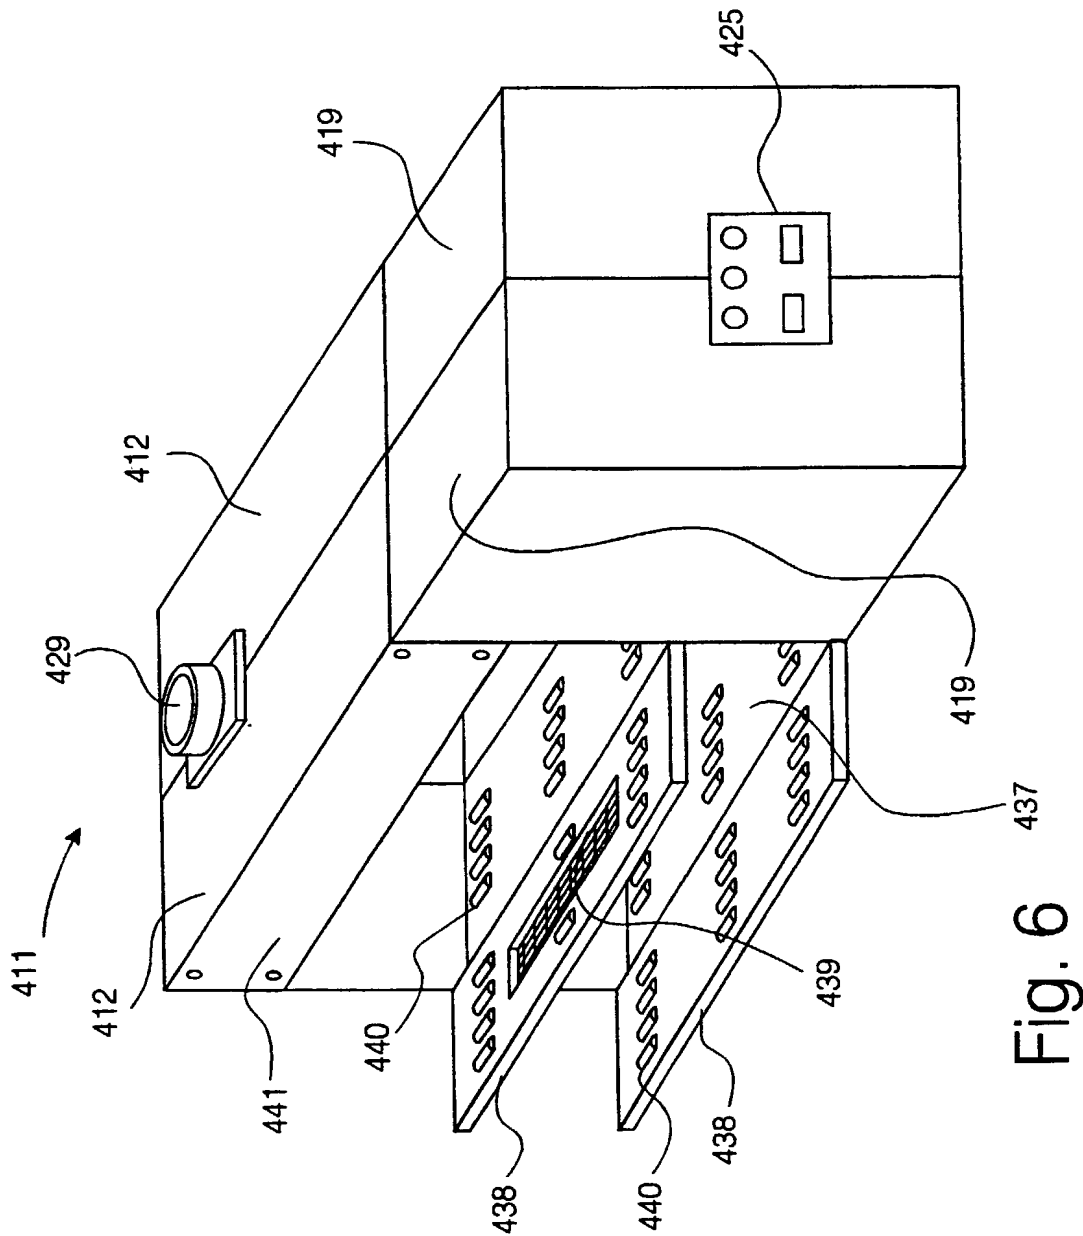


Fig. 6

7/7

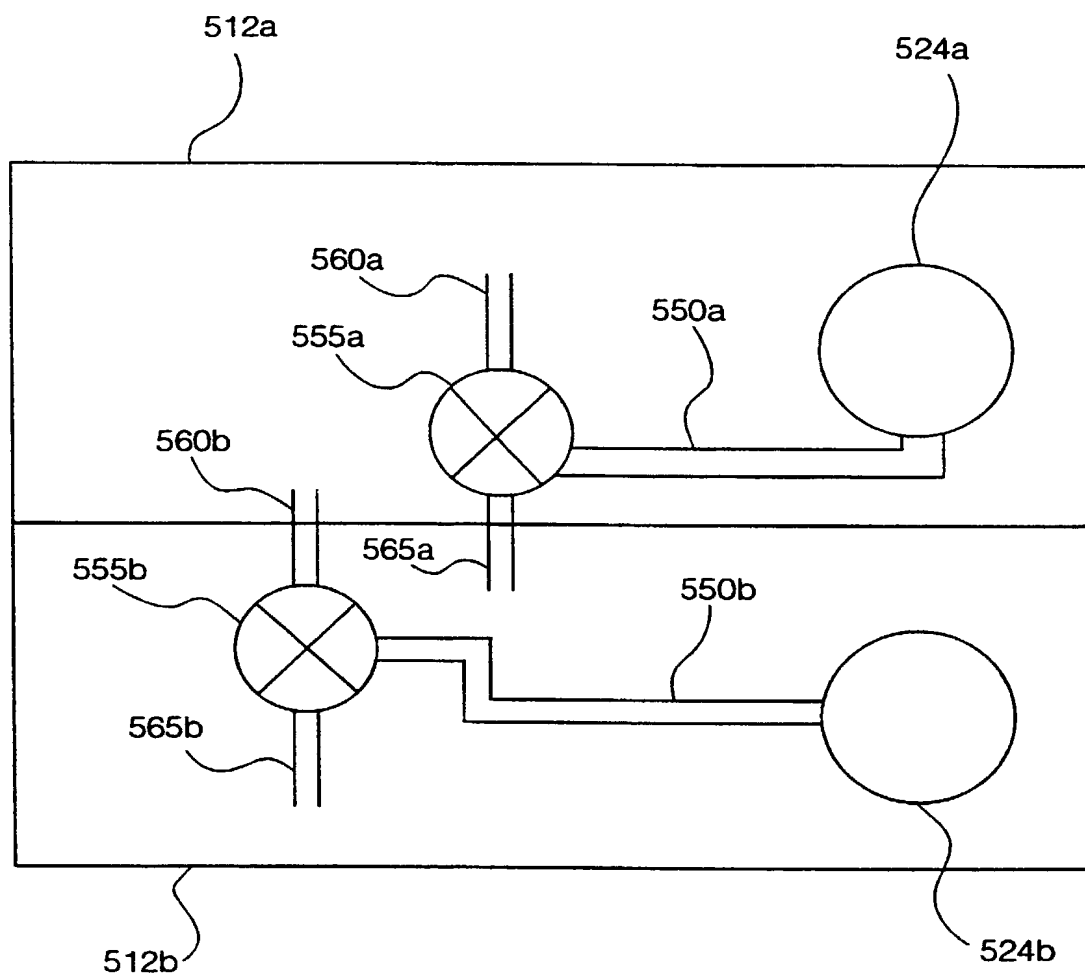


Fig. 7

ATTORNEY DOCKET NO. BKR-25102/01**DECLARATION, POWER OF ATTORNEY AND PETITION**

As the below named inventor, I hereby declare:

my residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole of the subject matter which is claimed and for which a patent is sought on the invention entitled Treatment of Carbonaceous Material the specification of which

☐ is attached hereto.

☐ was filed on _____,

as Application Serial No. _____

and was amended on _____ (if applicable).

☒ was described and claimed in PCT International Application No PCT/GB00/03546
and as amended under PCT Article 19 on _____ (if any).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent & Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

PRIORITY CLAIM UNDER 35 USC § 119(a)-(d)

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) or §365(b) of any foreign applications(s) for patent or inventor's certificate, or §365(a) of any PCT International Applications designating at least one country other than the U.S. listed below and have also identified below any foreign application for patent or inventor's certificate or of any PCT International Applications designating at least one country other than the U.S. having a filing date before that of the application on which priority is claimed:

☐ no such applications have been filed

☒ application(s) listed below:

PRIOR FOREIGN APPLICATIONS

(Filed More Than Twelve Months (Six Months for Design) Prior To This Application)

GB 9921520.4
(Number)

GB
(Country)

14.09.1999
(Day/month/year filed)


POWER OF ATTORNEY

And I hereby appoint Ernest I. Gifford, P.O. Reg. No. 20,644; Allen M. Krass, P.O. Reg. No. 18,277; Irvin L. Groh, P.O. Reg. No. 17,505; Douglas W. Sprinkle, P.O. Reg. No. 27,394; Thomas E. Anderson, P.O. Reg. No. 31,318; Ronald W. Citkowski, P.O. Reg. No. 31,005; Judith M. Riley, P.O. Reg. No. 31,561; Douglas J. McEvoy, P.O. Reg. No. 34,385; Ellen S. Cogen, P.O. Reg. No. 38,109; Roberta J. Morris, P.O. Reg. No. 33,196; John G. Posa, P.O. Reg. No. 37,424; Douglas L. Wathen, P.O. Reg. No. 41,369; Avery N. Goldstein, P.O. Reg. No. 39,204; Mark D. Schneider, P.O. Reg. No. 43,906; and Beverly M. Bunting, P.O. Reg. No. 36,072, as my attorneys, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith. Send all correspondence to: D Sprinkle, 280 N. Old Woodward Avenue, Suite 400, Birmingham, Michigan 48009; Telephone (248) 647-6000.

DECLARATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole inventor **PEARSON, Frederick**

1-0
X  X
Inventor's signature

Date 26 February 2002

Citizenship British

Residence Great Britain

GBX

Post Office Address 6 Columbas House, Trossachs Drive, Bath BA2 6RP, Great Britain